

# ADA-CDROM-SATA-DIREKT-SCREW



Adapter für Slimline CDROM Laufwerke mit S-ATA Standard

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support

## 1. Funktionale Beschreibung

Anschlussadapter für Slimline CDROM-Laufwerke mit S-ATA Standard.

Mit diesem Adapter können Sie das CDROM-Laufwerk mit seinem speziellen 7P+6P Steckverbinder an ein Motherboard mit gängiger S-ATA Buchse anschliessen.

Die Stromversorgung erfolgt wahlweise über einen standard 3,5 Zoll

Stromversorgungsstecker,

oder über das ES&S POWERSPIDER System.

- Verwendbar mit Slimline CDROM-Laufwerken die ein 7P+6P S-ATA Anschluss haben
- Direkt verschraubbar an das Laufwerk
- Anschliessbar über ein Standard-S-ATA Kabel sowie ein Stromversorgungskabel, 4 pol, R=2.54mm
- Auch verwendbar mit ES&S POWERSPIDER Strom- und Spannungsverteilungssystem


Lieferumfang: Adapter, 2 x Kunststoffabstandhalter, 2 x Schrauben

Passende POWERSPIDER Komponenten:

Kabel: KAB-POWERSPIDER-FDD4F-0300LI, 300mm (auch andere Längen verfügbar)

Adapter: ADA-POWERSPIDER-4P / 6P

## 2. Bilder

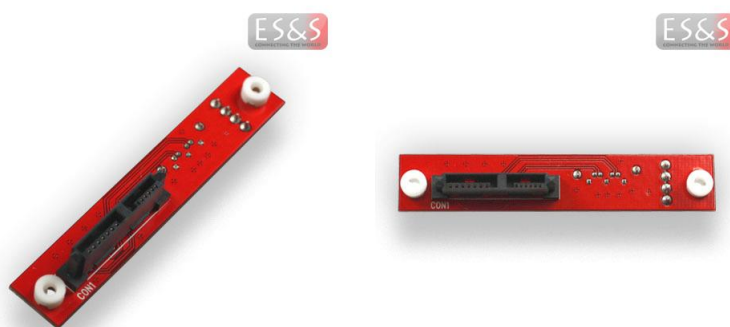

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support



### 3. Abmessung

Größe: 68,7 (L) x 12,3 (B) x 23,5 (H) (in mm)

### 4. Temperaturbereiche

Betriebstemperatur: -20°C bis 85°C

Lagertemperatur: -40°C bis 85°C

### 5. Gewicht

Gewicht ohne Verpackung: 5,8 g

Gewicht mit Verpackung: 7,0 g

**DISCLAIMER:**

In the absence of confirmation by device specification sheets, ES&S Oliver Reiners takes no responsibility for any defects that occur in equipment using any of ES&S's devices, shown in catalogs, data books, etc. Contact ES&S in order to obtain the latest device specification sheets before using any ES&S's device. ES&S reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact ES&S in order to obtain the latest specification sheets before using any ES&S's device. Manufacturing locations are also subject to change without notice. Observe the following points when using any device in this publication. ES&S takes no responsibility for damage caused by improper use of the devices. ES&S's devices shall not be used for equipment that requires extremely high level of reliability, such as: -Military and space applications -Nuclear power control equipment -Medical equipment for life support